



Intelligent Door Solutions

A DESIGN FOR EVERY HOME



ROLLER

SIDE-HINGED

SECTIONAL

TIMBER

STEEL UP & OVER

Novoferm Garage Door Range

PREMIUM GARAGE DOOR SOLUTIONS



www.novoferm.co.uk

Our Story

Novoferm are proud to be a part of the Sanwa Holding Corporation, founded in 1986 and today, considered to be a major global player in the access systems industry.

Sanwa conduct business in 25 countries and regions worldwide with a strong presence in Japan, North America, and Europe.

At Novoferm, we are building a team and giving them the support to achieve our ambitions. We will continue building on the improvements and investments that have already begun to improve lead-time reliability and quality for all our clients.

Our vision is to lead through organic business improvement, investment, digital enablement, and tuck-in acquisitions.



Contents

We have the right solution for you that it is tailored to your exact requirements. Whether you're building a new garage or renovating an existing one, you'll find that our incredible selection of doors are always the right choice.



Introduction & Benefits	4-5	Steel Personnel Doors	33
Which Door	6-7	Steel Door Colours & Glazing	34
Insulated Sectional Doors	8-11	Novogate	35-37
ISO 45 EVO	12-13	GRP Door Range	38-40
Insulated Wicket Doors	14-15	GRP Door Colours & Glazing	41
Insulated DuoPort® Side Hinged Doors	16	Timber Up & Over Doors	42-43
Insulated Sectional Side Doors	17	Timber Side-Hinged Doors	44
Insulated Sectional Door Colours	18	Timber Door Colours & Finishes	45
Insulated Sectional Door Glazing	19	Automate your Garage Door	46
Novorol Roller Doors	20-23	Novoport®	47
Steel Up & Over Doors	24-27	Accessories	48-49
Novoguard Doors	28	Warranty and Maintenance	50
NovoTherma	29	Terms and conditions	51
3-Point Locking	30		
Side Hinged Doors	31-32		

**Your Door,
Our passion...**



“A house is made of walls and beams; a home is built with love and dreams”

PREMIUM GARAGE DOOR SOLUTIONS

Come home to Novoferm

Introducing the **Novoferm Garage Door Range** – a collection of residential up and over, side hinged, sectional and insulated roller garage doors.

Available in steel and GRP, our doors incorporate the latest innovations in design, technology, and security.

The architecture of our doors is what sets us apart from our competitors, from protecting against intruders to keeping properties warm and dry and the diverse range of customisable options available.

Discover the benefits of a Novoferm Door

✓ Automation/Operators

The complete range of automatic doors listed in this brochure can be operated remotely with one of our tamper-proof hand transmitters. Alternatively, you can choose from one of our handy remote switches.

Our range of powerful handheld operators come loaded with features such as flexible door and lighting control and built-in security protection. Plus, our operators can work in tandem with our smartphone app for maximum convenience.

✓ Space-Saving

Our sectional and roller doors open vertically, unlike up and over doors that swing outward, so you can use every inch of your driveway.

✓ Security

Our garage doors come with a fully automated option, so there is no lock to pick or force. Rolling code technology in the control system prevents "code grabbing". Anti-thief features give further protection against unauthorised entry and an integral courtesy light illuminates the garage interior.

Plus, our doors come with other security features, from a built-in emergency sensor to a self-locking motor.

✓ Colours/RAL Colours

Our doors are available in an array of eye-catching colours, with options to suit any preference and the period and aesthetics of your home.

✓ Timber Effect/ Finishes

Many of our steel doors boast stunning timber effects and finishes, allowing you to enjoy the best of both worlds. Options include golden oak and rosewood finishes.



✓ Insulation

Premium insulation keeps your property warm and dry in the winter and cool in the summer. It can also help with dampening external noises.

✓ NovoGuard

Novoguard Secured by Design doors are certificated CS 5051 STS202, which is approved by the ACPO (Association Of Chief Police Officer).

Features include:




- Heavy-Duty Strengthening Ribs
- Heavy-Duty Springs
- Secure Locking Brackets
- Inside Locking Handle



Which Door?




Selecting the right opening

There are a few factors to consider before finding the perfect door for your home or commercial building. To help you find the right type of garage door, consider the building and space you have to work with, including the ceiling height.

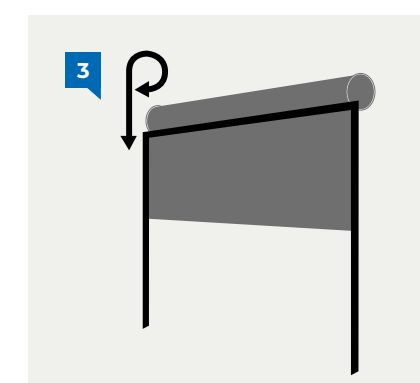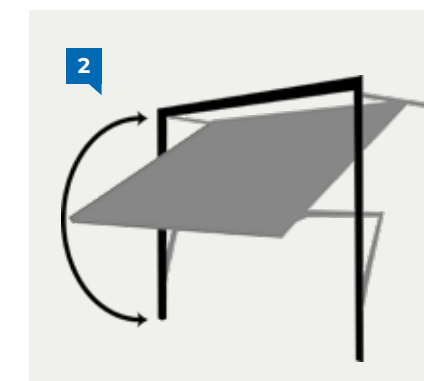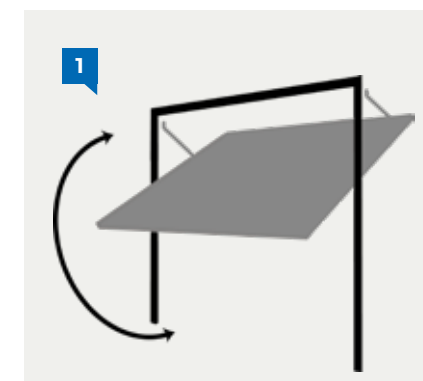

Manufacturing doors for over 70 years, Novoferm has brought many innovations and firsts to the garage door industry:

- Novoferm introduced the concept of the 'panel door', from which the majority of today's garage door designs are derived!
- Novoferm designed the Berwick up and over door, the first to give the appearance of traditional side hinged doors

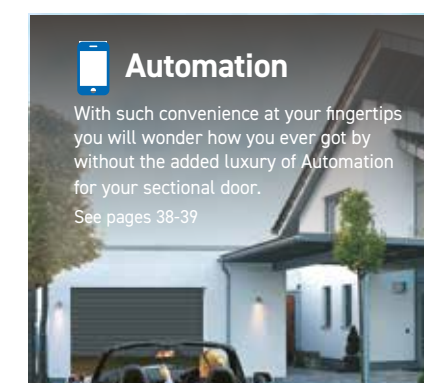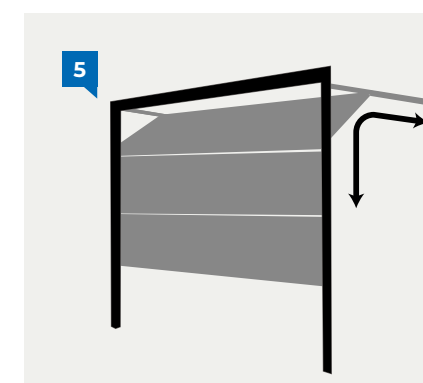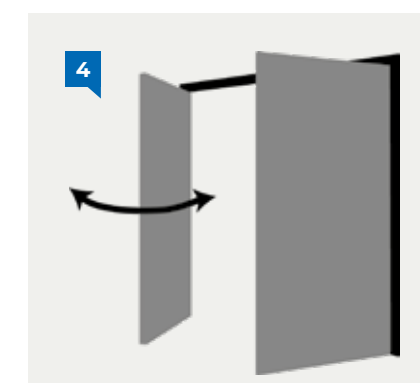

Automation

With such convenience at your fingertips you will wonder how you ever got by without the added luxury of Automation for your sectional door. See pages 38-39

Canopy Doors

- 1** Up and over canopy doors are the most popular style of lifting gear in the UK with a vast range of door styles to suit. Ideally matched to where there is limited headroom for tracks.

Retractable Doors

- 2** An alternative lifting gear for use with up and over doors. Horizontal tracks are attached to the top of the door frame to guide the door open, providing an exceptionally smooth opening and closing action.

Roller Doors

- 3** Roller doors travel vertically, forming a compact coil above the opening, meaning minimum space requirements both inside and out. Slimmed down versions requiring even less headroom are available for the Novorol range.

Side Hinged Doors

- 4** Popular 'traditional' operation and ideal if there are obstructions within the garage. Excellent security and very durable construction ensure long trouble-free service.

Sectional Doors

- 5** Vertical opening allows 'park-right-up' convenience, whilst the extension or torsion spring operation gives a super smooth mechanism. Enclosed moving parts and push away joints to the panels make for finger safe operation.

Getting your garage door right is important, especially since it is something that keeps valuables safe and gives a great first impression. It isn't just about picking out whichever you think looks the best, there are other details to also take into consideration. This quick guide will help you come to the right decision.

Novoferm offer ranges of doors operating in several different ways. Depending on your preference and the physical characteristics of your garage, some types of operation may be more suitable for you than others. The information here will give you an insight into the choice of operating mechanisms and their features.



Insulated Garage Door Range

Insulated Sectional Doors
Insulated Wicket Doors
Insulated DuoPort® Side Hinged Doors
Insulated Sectional Side Doors
Novorol Roller Doors



Insulated Sectional Doors



SCAN TO SEE MORE DETAILS

Novoferm's sectional garage doors are made up of separate sections that vertically lift and then run on tracks back into the garage. This style of opening allows you more space in front of the garage, as they do not swing out which means you can use every inch of available space in front of your garage.

Our insulated sectional doors comprise the highest quality materials including a built-in layer of insulation. This keeps your garage warm and dry in the winter or cool in the summer, helping to control your energy bills. It also helps reduce noise levels.

You can choose from three different insulation options depending on your requirements - ISO20 (20mm), ISO45 (45mm) and ISO70 (70mm).

Features and Benefits


- Tension Spring
- Interference-Protected Deflection Pulley
- New Cable Mount
- Multiple Extension Spring Assemblies
- NovoPort® - Unique and Flexible
- Anti-Pinch Inside and Out
- Interference Protection
- Double Skinned Insulation
- Lip seals on Frame
- Stainless Steel Frame Base

Heat insulation values up to:

ISO20 doors
 $K = 1.0W/m^2K$

ISO45 doors
 $K = 0.46W/m^2k$

ISO70 doors
 $K = 0.34W/m^2k$

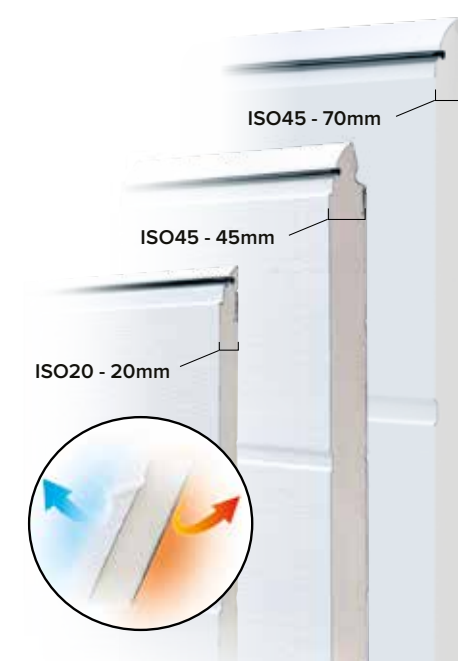

WARRANTY COVER



MADE TO MEASURE



REMOTE OPTION



SECURITY LOCKING



INSULATED SECTIONAL DOOR

Styles



Flush | ISO20/45/70



Horizontal Rib | ISO20/45



Large Rib | ISO20/45/70



Georgian Panelled | ISO20/45



Georgian Panelled Glazed | ISO20/45

- Space-Saving
- Great Insulating Performance
- Built-in Safety Features
- Market-Leading Security




NEW: Exceptionally good heat insulation thanks to the thermal break



HIGHLIGHTS

- ✓ Only from Novoferm: the Evolution premium sectional garage door with thermal break.
- ✓ Significantly improved heat insulation value for the section of $U(p) = 0.46 \text{ W/m}^2\text{K}^*$
- ✓ Up to 17% improved heat insulation for an installed door.*

NEW!

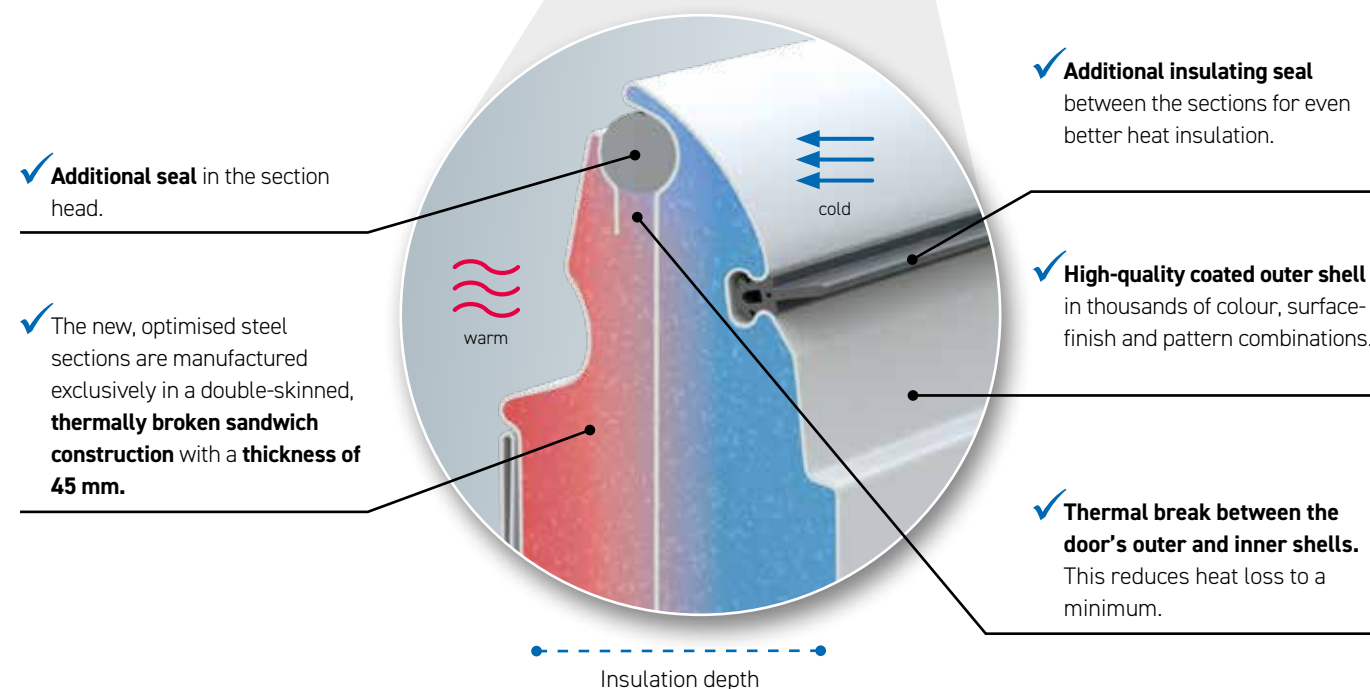

- ✓ Additional insulating seal between the sections for even better heat insulation.

- ✓ High-quality coated outer shell in thousands of colour, surface-finish and pattern combinations.

- ✓ Thermal break between the door's outer and inner shells. This reduces heat loss to a minimum.

- ✓ Additional seal in the section head.

- ✓ The new, optimised steel sections are manufactured exclusively in a double-skinned, thermally broken sandwich construction with a thickness of 45 mm.

Insulation depth

*With respect to door solutions with comparable section thicknesses. Performance dependent on door pattern and size



INTERNAL VALUES

What's behind the Evo 45

- 1 New: harmonious look for the inside door surface**
A highlight of the Evolution premium door is the harmonious appearance of the inside of the door. The surface here is in Traffic white (similar to RAL 9016). In addition to the profiles or section end caps in RAL 9016, the outer colour of the door is also no longer visible on the inside as the door rolls up or down.
- 2 New: thermal barrier**
The exclusive thermally broken sections, with PUR rigid polyurethane foam core and additional seals between the sections, deliver even greater heat insulation.

- 3 New: variable floor profile**
The new floor profile on the bottom edge of the garage door compensates for minor floor unevenness of up to 10 mm, and long holes ensure high flexibility during installation.
- 4 Great flexibility: optional spring technology**
The Evolution premium door can be optionally equipped with multiple tension spring assemblies or torsion springs. The vertical tension springs require a smaller installation depth (in combination with a low header) and open up new possibilities when space is limited. On larger sizes, the door is equipped with torsion springs either front or back.

Why choose a Wicket Door?

Wicket doors are a great alternative to side doors in cases where there's insufficient space to the side of the main door.

Wicket doors are standard doors that are integrated into the main door leaf.

The purpose is to allow quick and easy access without having to open and close the main door.

This also helps you manage security and privacy better as the main door will remain closed when not in use.



Insulated Wicket Doors



SCAN TO SEE MORE DETAILS



Horizontal Rib | ISO45



Large Rib | ISO45



Horizontal Rib Glazed | ISO45

Wicket doors are available for all ISO45 sectional garage doors up to a width of 5m. They offer a practical passage width of 80cm and provide perfect heat insulation due to the double-skinned insulation used.



Flush | ISO45



Panelled Glazed | ISO45



Insulated DuoPort® Side Hinged Doors



SCAN TO SEE MORE
DETAILS



Insulated DuoPort® side hinged doors consist of two doors that open “barn door” style rather than vertically. These doors are available as a 50/50 split with both door leaves of equal size. There's also the choice to have the doors open inwards or outwards.

Our Insulated DuoPort® side hinged doors are available in a range of patterns, surfaces, and colours.

Our insulated DuoPort® leaf doors offer you the possibility to use your garage as a utility room, for leisure time or hobbies. You can choose whether to open both doors or just the active door.



Horizontal Rib



Large Rib



Panelled



Flush

Ideal for private garages

DIMENSIONS with an opening width and height from 1400mm x 1900mm (symmetric division) to max. 2590 x 2520mm.

Outstanding Heat Insulation

INSULATED Heat insulation is ensured by the 45mm rigid PUR foam core.

Flexible Installation

PRACTICAL block door frame allows flexible installation.

Configurations

FLEXIBLE door leaf either opening outwards or inwards with active and inactive leaves positioned either to the left or right.

Added Security

SECURE 3-point locking with hinge lock is available as an optional extra.

Wide range of Colours

CHOICE OF colours, patterns and surfaces as well as additional fixings such as glazing.

Insulated Sectional Side Doors



Horizontal Rib



Large Rib



Flush



Panelled Glazed



SCAN TO SEE MORE DETAILS



Would you like a matching side door for your insulated sectional doors?

With our insulated sectional side doors, you can be in and out in no time through a matching side door. There's no need to raise and lower the whole garage door just to get to your bike, tools, or lawnmower.

We have matching side doors for all sectional garage doors for when you need to nip in and out of your garage.

All side doors are built strong and durable and come fully insulated with a handle set and security lock as standard. Weatherseals help keep out the elements. ISO20 doors feature a door leaf frame and corner door frame made from steel. ISO45 doors feature a door leaf frame and block door frame made from aluminium. Robust hinges provide long-term, dimensionally accurate opening and closing. The hinges are also three-way adjustable, allowing for precise adjustments during assembly.



Colours

Insulated doors can work with your lifestyle in so many different ways.


Textures



Essential Colours



Premium Colours

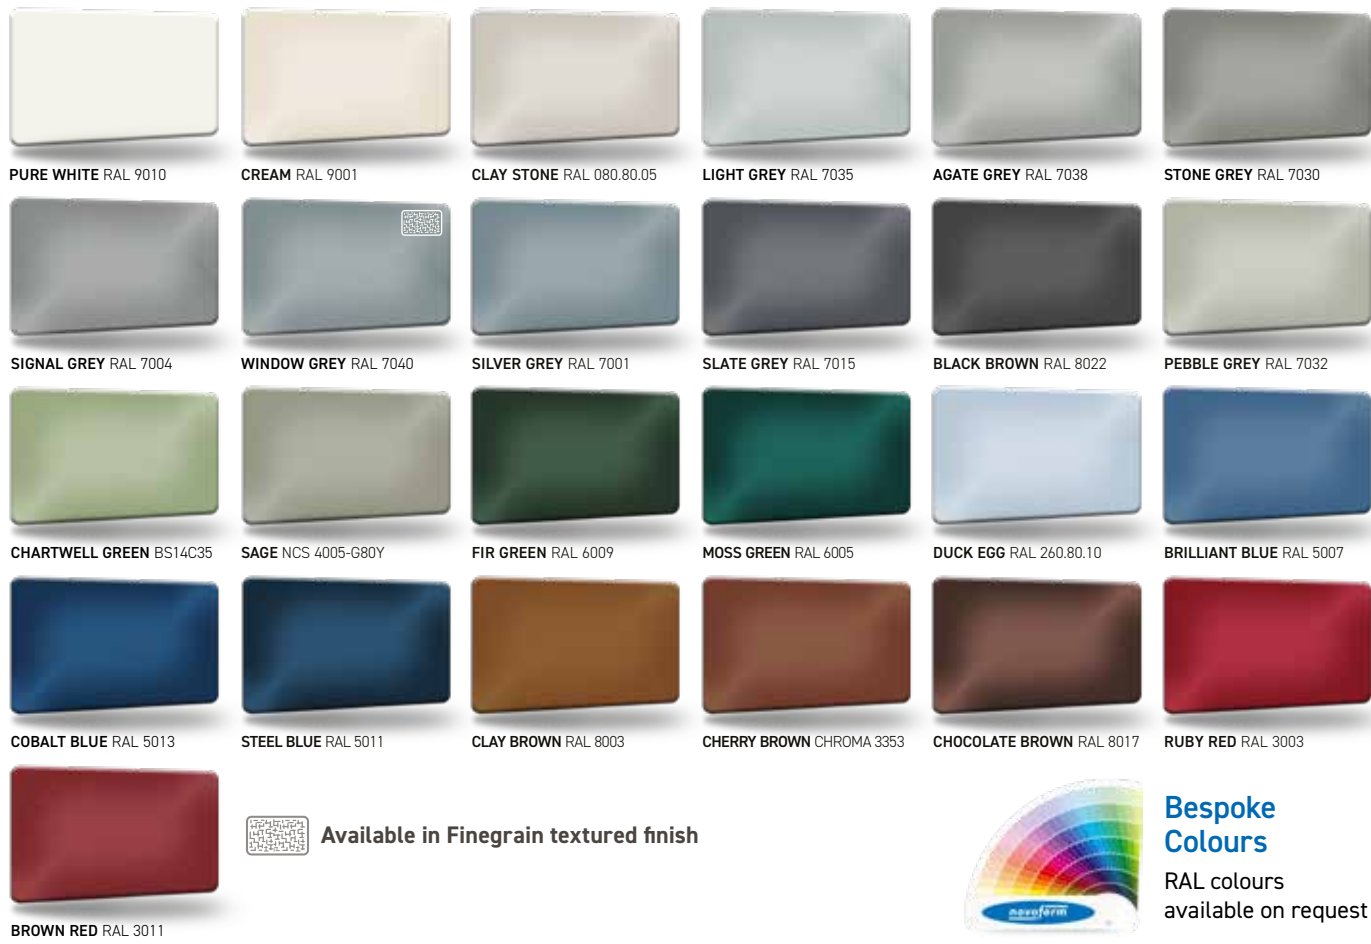

Timber Effect

Our insulated Sectional garage doors are available with 4 different weather-resistant, top-coated film laminates in authentic, rustic wood effects with a smooth surface. In addition to the large rib pattern, you can now also order all the wood effects in the flush and some in the panel pattern.



Timber Effects are only available in Smooth Texture.

Glazing

All Novoferm glazing panels are manufactured out of weather-resistant acrylic glass or impact-resistant polycarbonate.



Glazing Options

Our attractive glazing options not only make a feature of your garage, but also let the light in, especially appealing if you use your garage as a storage room or workshop.

Novoferm glazing panels stand out due to their high transparency and have excellent heat insulating properties - just like our insulated sectional garage doors.

Horizontal Light Strip



Porthole Stainless Steel Window Surround



Square Aluminium Window Surround (Vertically or Horizontally)



Plain Clear | Crystal



Cross Clear | Crystal



Rhombus Clear | Crystal



Square Leaded Clear | Crystal



Diamond Leaded Clear | Crystal

Sunrise Patterns

The 'sunrise' pattern can be modified to suit different width garages up to 5.5metres wide.



Sectional doors are bespoke and made to order

All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Novorol Roller Doors

The Novorol combines a space saving design with the convenience of an electrically operated automatic door.

The door lifts vertically and rolls into a box at the head of the garage door opening, providing more space in front of the garage. This allows you the option to park closer as the door does not swing out like a traditional garage door. This unique design also allows you more space inside the garage for storage etc. Novorol roller doors are safety certified to EN12453 and fitted with a NovoShield and a safety edge as standard.



Security Features



Scan QR code for further information

NovoShield

Supplied and finished in white as standard colour, shields the user from accidental finger entrapment and provides an attractive finish to the door curtain.

Internal Manual Override

A connector and crank handle are supplied as standard, so your door can be opened, from inside, even during a power cut.

Guide Rails

Guide rails made from aluminium profile with a white polyester powder coated finish.

Safety Edge

Supplied as standard. At the bottom edge of your door is an emergency sensor which will stop and reverse when the door is in operation, if it senses an obstruction.



Tamper Alarm

Tamper Alarm as standard



Novoferm UK are pleased to announce our Novorol 77 Insulated Roller door (Up to 3m) is Secured by Design (SBD) accredited, (STS222 tested - Passed to BR1).

Secured by Design (SBD) is the official UK Police security initiative that promotes building products proven to reduce crime. Products that receive the 'Secured by Design' accreditation are certified as providing the highest levels of security. *On behind fit Installation only. Excludes vision lath option. Excludes low level EMR.

Control System

An internal courtesy light is provided within the self contained control box.

Novorol 77 Door Features:

- Guides and Box Colour Matched as Standard
- Polyester Painted 70mm Guides up to 3m Wide (Colours available)
- Polyester Painted 90mm Guides over 3m wide (Colours available)
- NovoShield Full Box supplied as standard. Box sizes subject to change dependent on curtain height. (Other box options available)
- Novorol Hard Wired Control Safety System
- Wireless Option Available
- Two 2-Channel Hand Transmitters
- Novorol 77 doors are available up to 5000mm wide and 2743mm high

Novorol 55 Door Features:

- Guides and Box Colour Matched as Standard
- 65mm Guides
- 205mm NovoShield Full Box
- Novorol Hard Wired Control Safety System
- Wireless Option Available
- Two 2-Channel Hand Transmitters
- Novorol 55 doors are available up to 3000mm wide and 2286mm high


Colour Collection

The combination of visual appeal and robust performance makes the Novorol insulated roller door a practical and stylish choice for enhancing your home's exterior.

All new colours are available on the Novorol 77 only.


Standard Polyester Colours

Available in 77mm only.

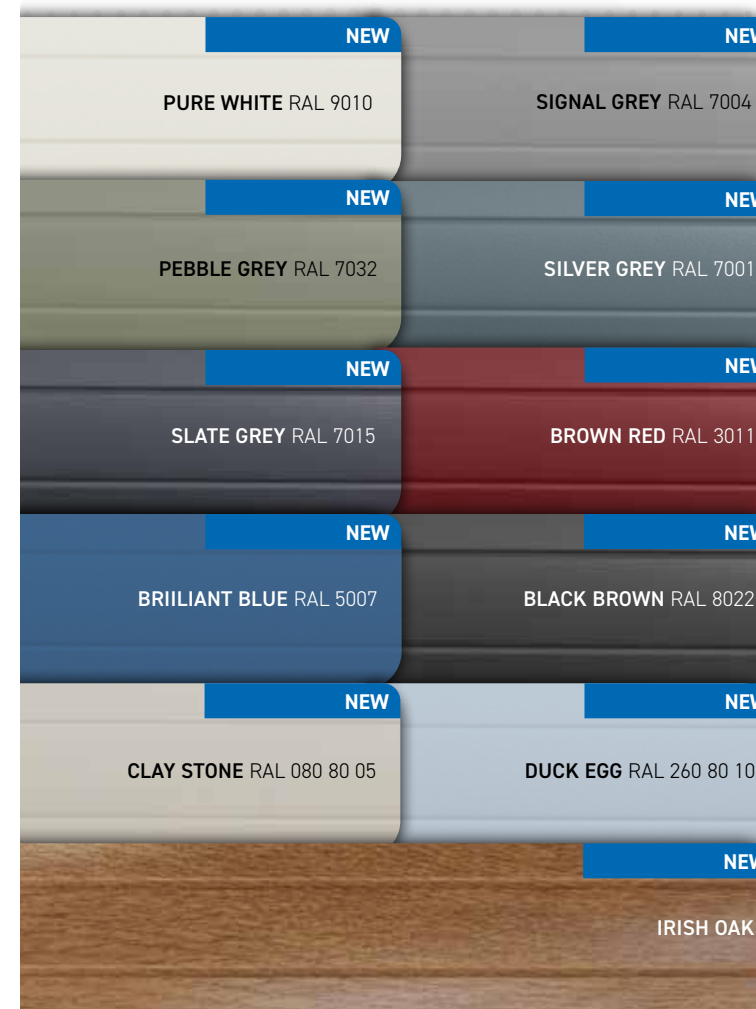

Standard Polyester Colours

Available in both 55mm and 77mm.

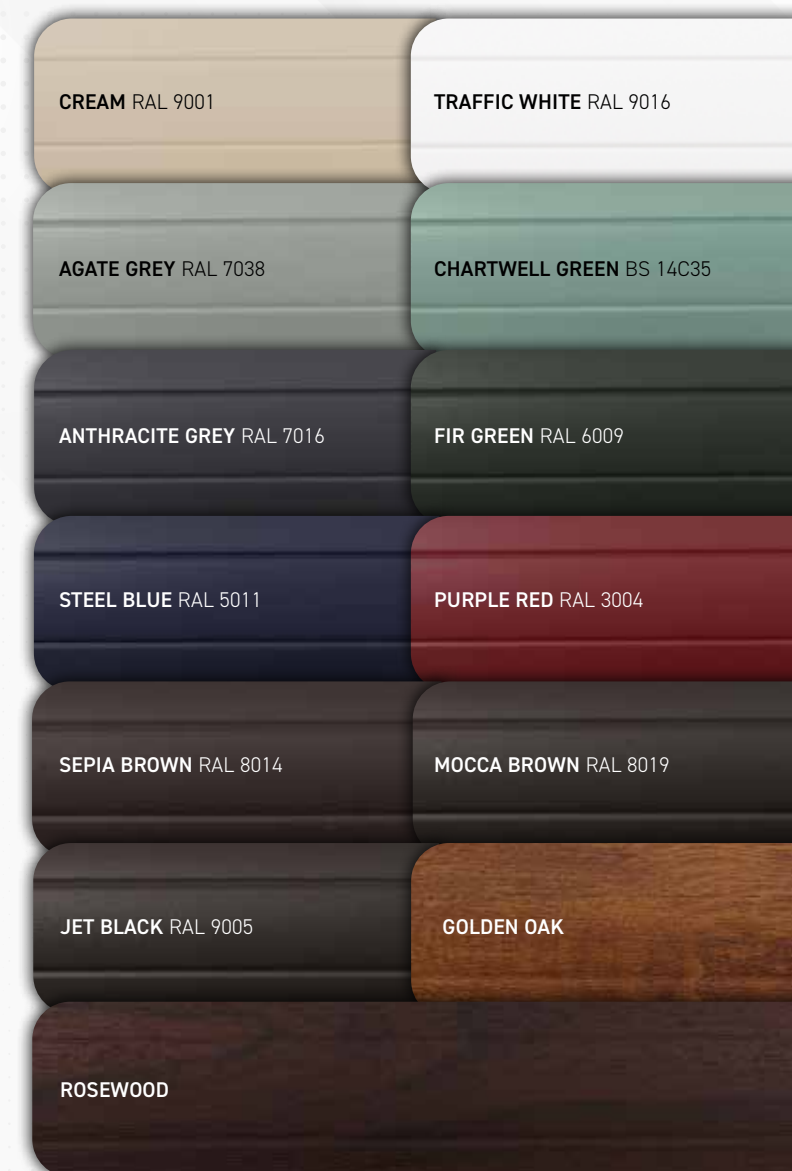

Elite Colours

Choose from 3 high grade Woodgrain Laminate finishes



All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible.

Garage doors supplied may vary in colour from the brochure representation.

Novorol Roller Doors

Product Specification



Safety sensing

Each door is equipped with a built-in, permanently wired safety sensor within the bottom weatherstrip. This sensor detects obstacles and automatically stops and reverses the door by a small distance to prevent damage or injury.



External Manual Release

If the power fails, a simple hand crank allows the door to be opened from outside the garage by hand.



Vision slats allow natural light into your garage

Polycarbonate clear glazing option is available on a proportion of the door curtain on the Novorol 77 only. This option is only available for doors in Black, White and Anthracite Grey.



Reliable Technology

Available with Somfy control unit as standard NR 20 or teleco control units available upon request. Enjoy the confidence of a five year warranty.



Safety Brake

Chosen for its performance and long-lasting durability, with no sacrifice in safety. The safety brake activates to halt the door's descent in the event of a motor failure.



Maximum Weather Protection

Engineered to help block cold draughts and keep your garage warm and usable with guide rails that are lined and a shaped rubber seal on the bottom slat.



Alarm as Standard

A built-in vibration sensor triggers a 100dB alarm if an attempt is made to force open the door



Full Box as Standard

The full box conceals the roll for a super-neat installation and encloses the door mechanism.



Space Saving

The door curtain neatly coils above the opening, ensuring that neither the door nor the any tracks extend into the garage, maximising storage space and driveway space.



Effortless Control

A number of additional extras from Novoferm & Somfy are available to enhance convenience.



Keyfob Transmitters

Two remote controls are supplied with every door. Extra remote controls can be added and are easy to program.



End Locks

Slats have endlocks as standard to assist the smooth operation of the curtain.



Direct Connect Locking

The door is held firmly shut by at least three locking straps, featuring heavy duty direct-connect linkages that provide enhanced resistance to forced entry.



Steel Door Range

Steel Up & Over Doors
Novoguard Doors – Secured by Design
Side Hinged Doors
Steel Personnel Doors



Steel Up & Over Doors



SCAN TO SEE MORE
DETAILS

Up and over doors are a simple yet effective design that opens by kicking outwards then sliding upwards back along a track that runs along the ceiling. These doors can be both manual or automated for added convenience.

Our steel up and over garage doors are available in a range of designs, colours and finishes.

Our steel up and over doors are specially prepared to ensure the maximum lifespan. The quiet rollers and abrasive strips ensure smooth operation. Multiple spring assemblies ensure sturdiness and ease of use.

Smooth Operation

ALL DOORS available with either canopy or retractable spring assisted gear systems for smooth, safe and reliable operation.

Safe and Secure

HIGH SECURITY supplied with 4-Point Slam latching as standard, or 4-Point Locking Bar as optional extra.



Other benefits include:

- ☒ High Distortion Resistance
- ☒ Wide Range of Colours
- ☒ Automatic Operators Available



WARRANTY
COVER



MADE TO
MEASURE



REMOTE
OPTION



SECURITY
LOCKING

STEEL UP AND OVER DOORS

Styles

Novoferm Steel Up & Over Garage Doors are the classic choice for your home. They are manufactured from premium grade galvanized steel and finished in white powder coat or powder coat in one of our standard colours. Black euro handle fitted as standard.



Berwick ■ ■



Horizontal ■ ■




Vertical ■ ■




Horsham ■ ■



Victor ■ ■

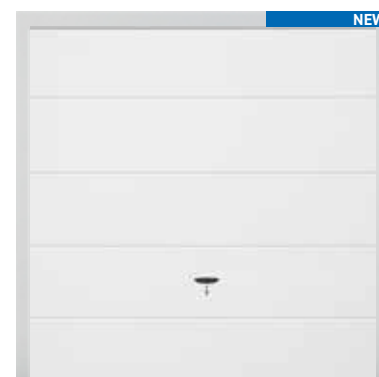

Helios ■ ■

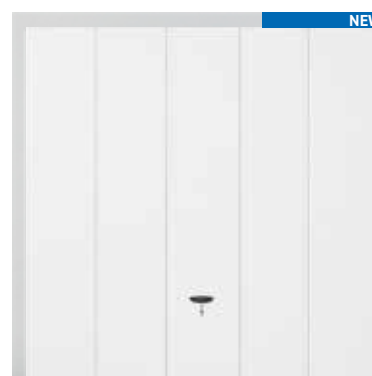

Venus ■ ■



Minster



Georgian

*Please note: For Helios and Horsham designs over a certain width, a central vertical panel will need to be inserted for stability.
Helios max width - 2496mm | Horsham max width - 2438mm



Regency ■ ■



Regency Glazed ■ ■



Berkeley Vertical ■ ■



Wentworth ■ ■



■ = Available in Rosewood
■ = Available in Golden Oak

 = Available in Secured By Design



Novoguard Doors



SCAN TO SEE MORE DETAILS

Novoguard Secured by Design doors are certificated CS 5051 STS202, which is approved by the ACPO (Association Of Chief Police Officer).

SBD an official security initiative operated by the UK Police Service with the intention of lowering crime while protecting people and businesses. SBD focuses on the improvement of products that include doors, windows, locks and walling systems. Products that receive the 'Secured by Design' accreditation are certified as providing the highest levels of security.

Our featured designs include our Retractable Vertical, Horizontal and Berwick designs that includes a 70mm steel fixing frame are available in any size up to and including 2438mm wide x 2134mm high.

Our Improved Security Doors:



Retractable Steel **Berwick**



Retractable Steel **Horizontal**



Retractable Steel **Vertical**



WARRANTY
COVER




MADE TO
MEASURE



SECURITY
LOCKING



NEW NovoTherma



NovoTherma is Novoferm's advanced insulated door available in **Side-Hinged** and **Side Personnel Doors**, engineered to deliver outstanding thermal performance, enhanced security, and long-lasting durability. Ideal for modern garages and side access points.

Designed as a superior upgrade to traditional non-insulated and single-locking doors, NovoTherma features a fully insulated panel construction paired with a robust 3-point locking system as standard. This combination provides improved energy efficiency, increased structural strength, and reliable protection against harsh weather and forced entry.

Key Features & Benefits

- **Stay Warmer, Save Energy:** Fully insulated door panels help maintain indoor temperatures and boost energy efficiency. U-Value from 2.4 W/m2.K and the insulation being Polyisocyanurate (PIR) with a 30mm thickness.
- **Easy Operation:** Smooth locking mechanism and balanced door movement.
- **Feel Secure:** A 3-point locking system delivers robust protection against forced entry; a security you can trust.
- **Clean Finish:** The internal white surface adds a sleek, contemporary look while sealing and safeguarding the insulated core.
- **Built to Last:** Durable construction resists wear, weather and everyday use for years of reliable performance.
- **Availability:** The NovoTherma upgrade is available with Personnel Doors and on Side-Hinged doors with a 50/50 split configuration and without glazing.



SCAN TO SEE MORE DETAILS

Side Hinged Doors

Side-Hinged doors open as per a normal pedestrian door with two door leaves connected by hinges at the side to the main door frame. Customers can choose a 50/50 split with both doors of equal size, or an offset configuration, with one smaller personnel door.

Our Side-Hinged doors are available in a range of patterns, surfaces, and colours, and customers can choose from an array of additional fittings.

All the door leaf frames are made from galvanised steel.

The robust hinges will provide long-term opening and closing that is dimensionally accurate. Choose whether to open both of the doors or just the active leaf and choose from a range of customisable fittings to personalise your doors.

Features and Benefits

- Centre overlap to help prevent forced entry and reduce draughts
- High Security Euro profile mortice lock
- Twin shoot bolts top and bottom for added security
- Stays to prevent the door opening further than 110 degrees
- All side hinged doors are supplied complete with 50mm frame
- Doors open inward & outward, with the lock available on the left or the right
- Left hand opening option available
- Side-Hinged doors are available in a 50/50 split or offset configuration* (*Only available in 9 Panel Georgian and Vertical designs)
- Side-Hinged doors are bespoke and made to order
- Optional upgrades available with 3-point locking system and NonoTherma insulation



WARRANTY COVER



MADE TO MEASURE



3-Point Locking System

Upgrade Across our Steel Side-Hinged and Matching Side Door Range.

Responding to growing demand for enhanced home security, our Research & Development division has introduced a robust 3-point locking mechanism across our Steel Side-Hinged doors and Matching Side doors range. Precision-engineered for maximum strength and load distribution, this new system delivers outstanding resistance to forced entry, offering both installers and homeowners greater confidence and lasting protection.

It's a dependable solution that delivers tangible peace of mind, meeting the highest expectations for safety and durability.

*This features is available as an optional extra and not provided as standard.



SIDE HINGED DOORS

Designs



- = Available in Rosewood
- = Available in Golden Oak
- = Door style available with Insulated NovoTherma
- = Please note that the rear of all NovoTherma Insulated doors will be finished in white

The large leaf can be the lead door. Please see the opening options (viewed from outside) below:

A 2/3-1/3 Left Hand Opening C 2/3-1/3 Right Hand Opening
 B 1/3-2/3 Left Hand Opening D 1/3-2/3 Right Hand Opening



Side-Hinged handles are available in black and silver



Steel Matching Side Doors

Steel Matching Side Doors are pre-framed and come complete with a Euro profile night latch, deadlock and four anti-drop anchored bolt hinges per door leaf. An optional security upgrade is also available with a 3-point locking system.

Doors can open inward and outward, with the lock available on the left or the right.

These doors are available in the following finishes to match the door ranges: Painted, Golden Oak or Rosewood.

All door leaf frames are made of galvanised steel, while robust hinges provide long-term, dimensionally accurate opening and closing.



- = Rear of all NovoTherma Insulated doors will be finished in white.
- = Available with Insulated NovoTherma. Not available with Glazed options.
- = Available in Golden Oak and Rosewood.

STEEL DOOR RANGE

Colours & Glazing



WARRANTY COVER



MADE TO MEASURE



SECURITY LOCKING

Essential Colours



TRAFFIC WHITE RAL 9016



JET BLACK RAL 9005



ANTHRACITE GREY RAL 7016



Bespoke Colours
RAL colours
available on request

Premium Colours



PURE WHITE RAL 9010



CREAM RAL 9001



CLAY STONE RAL 080.80.05



LIGHT GREY RAL 7035



AGATE GREY RAL 7038



STONE GREY RAL 7030



SIGNAL GREY RAL 7004



WINDOW GREY RAL 7040



SILVER GREY RAL 7001



SLATE GREY RAL 7015



BLACK BROWN RAL 8022



PEBBLE GREY RAL 7032



CHARTWELL GREEN BS14C35



SAGE NCS 4005-G80Y



FIR GREEN RAL 6009



MOSS GREEN RAL 6005



DUCK EGG RAL 260.80.10



BRILLIANT BLUE RAL 5007



STEEL BLUE RAL 5011



COBALT BLUE RAL 5013



CLAY BROWN RAL 8003



CHERRY BROWN CHROMA 3353



CHOCOLATE BROWN RAL 8017



RUBY RED RAL 3003



BROWN RED RAL 3011

Timber Effect →

Choose from 2 high grade Timber Effect laminate finishes.

*Available in some designs only, please check with your installer. All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Rivets are visible on the face of the door in some door styles and all Timber Effect laminated doors.



GOLDEN OAK



ROSEWOOD



Matching hinge available in this colour

Glazing & Leading Options

The following Novoferm side hinged and up and over doors are available with your choice of glazing and leading options.



Clear



Stippled



Black



Diamond Lattice



Square Lattice



Queen-Anne Lattice

Novogate Steel Gates

NOVOGATE offers a practical, durable and attractive alternative to traditional timber gates.

NOVOGATE is an integral part of a property, creating a physical barrier between public and private areas, maintaining both privacy and security.

Strong and Secure

NOVOGATE is manufactured using Magnelis® steel as standard.

This revolutionary material offers an industry leading level of corrosion resistance, meaning a 10 year warranty applies in most locations when supported with basic maintenance.


Finished in a Polyester Powder Coating in a choice of colours, NOVOGATE is a practical and cost effective solution, offering a long lifespan and attractive appearance.

Applications

NOVOGATE is ideal for any application requiring a secure, long lasting and stylish solution such as front or rear garden paths, entrances, access points and driveways with a suitable structure to either side.

The hard wearing and low maintenance properties of NOVOGATE means that they're particularly beneficial for installations where upkeep needs to be kept to a minimum, for example social housing; student accommodation; rented properties, or retirement, assisted or shared living accommodation.

We can also manufacture double gates for larger and more open areas.

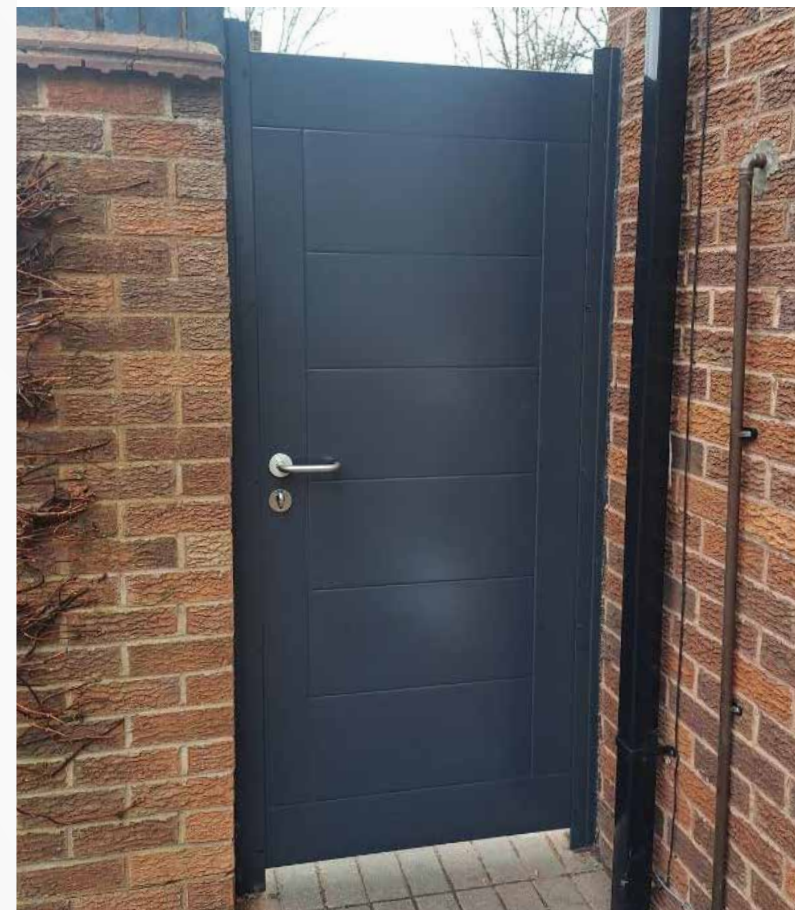

Security and Style

Availability

NOVOGATE is available in a selection of standard sizes to suit varying structural openings, either 900mm or 1000mm wide, and in a frame height of 1200mm, 1600mm or 2100mm.

These items come with installation posts and are available with an incredible lead time of just 15 working days.

Hardware Choices

1200mm high will be supplied with a gate latch as standard, with a mortice lock for gates over 1200mm.

We offer a choice of either matt black or stainless steel hardware to suit your preferences, and this covers all aspects-handles, latches, escutcheons and hinges.

Bespoke Choices

Looking for something a little different?

We can also manufacture gates to custom sizes on request to ensure the perfect fit (extended lead time applies).

Colours

Finishes



SMOOTH

Essential Colours



TRAFFIC WHITE RAL 9016



JET BLACK RAL 9005



ANTHRACITE GREY RAL 7016

Premium Colours



PURE WHITE RAL 9010



CREAM RAL 9001



CLAY STONE RAL 080.80.05



LIGHT GREY RAL 7035



AGATE GREY RAL 7038



STONE GREY RAL 7030



SIGNAL GREY RAL 7004



WINDOW GREY RAL 7040



SILVER GREY RAL 7001



SLATE GREY RAL 7015



BLACK BROWN RAL 8022



PEBBLE GREY RAL 7032



CHARTWELL GREEN BS14C35



SAGE NCS 4005-G80Y



FIR GREEN RAL 6009



MOSS GREEN RAL 6005



DUCK EGG RAL 260.80.10



BRILLIANT BLUE RAL 5007



COBALT BLUE RAL 5013



STEEL BLUE RAL 5011



CLAY BROWN RAL 8003



CHERRY BROWN CHROMA 3353



CHOCOLATE BROWN RAL 8017



RUBY RED RAL 3003



BROWN RED RAL 3011



Bespoke Colours
RAL colours available on request

About MAGNELIS®

Magnelis® is a game-changer in the world of metallic coating, offering unparalleled corrosion protection. It is manufactured using a continuous hot-dip galvanised process, where it is immersed in a unique molten bath composed of zinc, 3.5% aluminium and 3% magnesium, giving it distinctive chemical properties.

This metallic coating forms a very dense, stable, and durable layer of protection, which prevents the underlying steel from encountering the ambient environment. It therefore gives all shaped steel the same level of protection as flat surfaces.

By comparing Magnelis® alongside galvanised steel, from our 1000-hour salt spray test, the results clearly exposed that Magnelis® resists corrosion for much longer than standard galvanised products, which is reflected in our unrivalled 10-year anti-corrosion warranty.



Galvanised Steel
20 µm after 6 weeks




Magnelis®
20 µm after 34 weeks

1 Thickness

55mm

2 Design

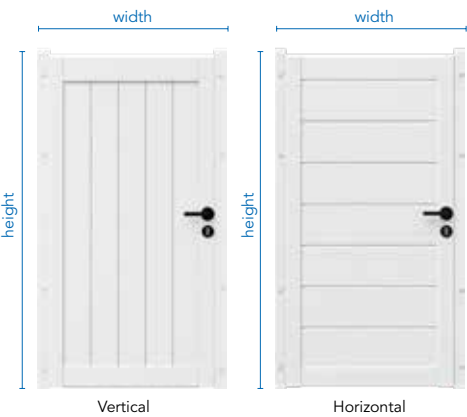

3 Standard Sizes

Structural Width	900mm, 1000mm or 1200mm
Frame Height	1200mm, 1600mm or 2100mm





GRP Door Range

Up & Over GRP Doors
Side Hinged GRP Doors

GRP Doors

GRP doors are composed of Glass Reinforced Plastic. Available as up and over and side hinged doors, GRP doors are lightweight, durable, and sturdy.

These doors come with excellent finished edge detail, and remote opening options.

Our GRP doors are supported by a solid steel frame, preventing frame rotting and weakening. Wood effects can be replicated, lending these doors a natural look that's indistinguishable from the real thing.



SCAN TO SEE MORE DETAILS

Up & Over GRP Doors

These doors are available in a choice of styles to suit all properties.




Weybridge (Gloss only)



Richmond (Gloss only)



Ashstead




Brockham




Cobham



Kingston



Verwood



Blandford



WARRANTY COVER



MADE TO MEASURE



REMOTE OPTION




SECURITY LOCKING




FINISHED EDGE DETAIL

Up & Over Timber Grain Effect GRP Doors

LOW MAINTENANCE Available in low maintenance smooth colour and incredibly lifelike timbergrain effect woodtones, these doors are virtually maintenance free.



Woodside




Winchester



Lingfield



Betchworth



Chertsey



Sunbury

Side Hinged GRP Doors

Our handmade Side Hinged GRP Doors are manufactured and finished to a high standard and come with the following features:



Verwood | Woodgrain




Richmond | Gloss White



Chertsey | Woodgrain



Richmond Glazed | Woodgrain



Verwood Side | Woodgrain

→ Centre Style Between Leaves to Prevent Forced Entry

→ Weather Seals Between Frame and Leaves for Draught Reduction

→ Heavy-Duty Steel Hinges for Maximum Security

→ Euro Dead Locking Latch and Black Lever Handles as Standard

GRP DOORS

Colours and Glazing

Essential Colours



TRAFFIC WHITE RAL 9016



JET BLACK RAL 9005



ANTHRACITE GREY RAL 7016



Bespoke Colours

RAL colours available on request

Premium Colours



PURE WHITE RAL 9010



CREAM RAL 9001



CLAY STONE RAL 080.80.05



LIGHT GREY RAL 7035



AGATE GREY RAL 7038



STONE GREY RAL 7030



SIGNAL GREY RAL 7004



WINDOW GREY RAL 7040



SILVER GREY RAL 7001



SLATE GREY RAL 7015



BLACK BROWN RAL 8022



PEBBLE GREY RAL 7032



CHARTWELL GREEN BS4800



SAGE NCS 4005-G80Y



FIR GREEN RAL 6009



MOSS GREEN RAL 6005



DUCK EGG RAL 260.80.10



BRILLIANT BLUE RAL 5007



COBALT BLUE RAL 5013



STEEL BLUE RAL 5011



CLAY BROWN RAL 8003



CHERRY BROWN CHROMA 3353




CHOCOLATE BROWN RAL 8017



RUBY RED RAL 3003



BROWN RED RAL 3011



Woodgrain Options



WHITE WOODGRAIN



MAGNOLIA



BLEACHED OAK



IRISH OAK



LIGHT OAK



TEAK



HONEY BEECH



GOLDEN BROWN



DARK OAK



ROSEWOOD



RED MAHOGANY



DARK MAHOGANY



ANTHRACITE GREY



EBONY

Glazing & Leading Options

For glazing and leading options please refer to the bottom of page 41.

Timber Garage Doors

Why Choose Timber Doors?

Timber garage doors are an ideal choice for those who value refined style as much as everyday practicality. With their natural warmth and timeless elegance, they instantly elevate the character of a property and create a welcoming first impression.

The rich grain and depth of real wood sit effortlessly alongside both traditional and contemporary architecture, enhancing kerb appeal while blending harmoniously with your home's exterior. Over time, timber develops a soft, characterful patina that adds depth and individuality, ensuring your door looks more distinguished as the years pass.

Novoferm timber garage doors are crafted from the finest grade Kiln Dried Western Red Cedar, selected for its stability, durability, and beautiful natural finish. Available in canopy, retractable, double and side-hinged options, the range combines premium materials with considered design to create a truly bespoke look for almost any style of property.

Up & Over Timber Doors

Novoferm timber up and over doors are bespoke and made to measure. Each door is supplied with a steel frame and chassis providing enduring strength.

All doors are supplied with a lock hole unless specified otherwise.



Suffolk



Chatham



Tudor



Windsor



Vertical



Horizontal



Madeley



Hertford



Henley



Caithness



Thame



Burlington



Dorset



Cleveland



Handles are black as standard

Side-Hinged Timber Doors

Novoferm timber side-hinged doors are bespoke and made to measure. Each door is supplied with a steel frame and chassis providing enduring strength.



Vertical



Horizontal



Henley



Cleveland



Thame



Dorset



Burlington



Hertford



Tudor



Windsor



Suffolk




Caithness



Chatham



Madeley



Side-Hinged handles are available in black and silver

novoferm

Intelligent Door Solutions

TIMBER DOORS

Colours, Finishes and Glazing



LIGHT OAK



MEDIUM OAK



GOLDEN OAK



DARK OAK



MAHOGANY



ROSEWOOD



TEAK



EBONY



WALNUT

Frame Bespoke and Heritage Colours

Frame and chassis colours are available in all essential and premium steel finishes. Please refer to page 4 for further details.

Door colours available in all essential and premium steel finishes.

For those seeking a more personalised touch, a wide range of popular heritage colours are also available on request to perfectly complement your chosen door and property style.

Bespoke Colours

RAL colours available on request



Popular Heritage Colours

Available on request



All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Glazing & Leading Options

The following Novoferm side hinged and up and over doors are available with your choice of glazing and leading options.



Clear



Stippled



Black



Diamond Lattice




Square Lattice



Queen-Anne Lattice

Automate your Garage Door



SCAN TO SEE MORE DETAILS



Smart Garage App

The new Novoferm Mobility App SmartGarage is available free of charge from the App Store or Google Play. With one "swipe" across the touch screen you can open and close the garage door, control the lighting, ventilation function and you can read out the operator parameters.

To use the mobility app, you need the mobility package, which contains the Novoferm Gateway and Novoferm WLAN module.



Novoferm garage door operators used with sectional doors can be controlled via the Novoferm Mobility APP "SmartGarage". You can download it free of charge from the App Store or Google Play.

All our garage door operators and additional hardware (e.g., light strips) are fitted with energy-saving LED lamps and many of our operators only consume 0.5 W in standby mode. All Novoferm operators are manufactured to the highest industry standards and come with a five-year guarantee.

Hand transmitters are protected by AES 128-bit encryption and multi-part rolling codes.

The approved 3-button technology helps with simple and fast adjustment of the operator functions. We also offer a variety of special attractive control pads which are constructed from UV-stable materials.

Advantages

- ✓ Intuitive Adjustment
- ✓ Smartphone-Enabled Door Control
- ✓ Remote Lighting
- ✓ Control More Than One Garage
- ✓ Suitable for Up and Over Doors



NovoPort®



SCAN TO SEE MORE DETAILS



"The NovoPort® Speed system offers an unparalleled solution, combining a state of the art operator with the market leading ISO 45 EVO sectional door range.

Breaking from tradition, the NovoPort® Speed operator is the only side mounted operator on the market. Instead of being fixed to the ceiling, it is integrated into the side door track. This innovative approach keeps the ceiling clear and eliminates common installation challenges, making it ideal for in-between fits and low ceilings."

Features

- ✓ Integrated high speed function for door opening that is up to 50 % faster (up to 29cm/s)
- ✓ Modern and 20 % flatter casing with continuous LED Strip for energy saving and bright illumination
- ✓ Integrated, indirect lighting with LED (6 Watt) switched on automatically when opening
- ✓ Automatic closing after a set time can be programmed (opto sensor required)
- ✓ The door can be operated by app or voice command
- ✓ Simple integration in existing smart home systems

Novomatic 573S 800 N



- Energy saving with 0.5 Watt power supply in stand-by mode.
- Power supply: 230 V / 50 Hz.
- Pull and push force 800 N.
- Running Speed: 24 cm/s.
- Maximum door area: 18 m2.
- App Control available.
- CE marked.

Novomatic 443 600 N



- Energy saving with 0.5 Watt power supply in stand-by mode.
- Power supply: 230 V / 50 Hz.
- Pull and push force: 600 N.
- Running speed: 18 cm/s.
- Maximum door area: 10 m2.
- App Control available.
- CE marked.



Accessories

You'll need the right accessories to go with the hardware of your choice



SCAN TO SEE MORE DETAILS

Hand transmitters



Mini-Novotron 522 Design hand transmitter
2-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 524 Design hand transmitter
4-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 522 hand transmitter
2-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 524 hand transmitter
4-channel, 433 MHz, KeeLoq rolling code



Wall mounting/silicon case hand transmitter
Suitable for use as case and wall mounting for Mini-Novotron 522 Design/ 524 Design and for Mini-Novotron 522/ 524.



Mini-Novotron 502 hand transmitter
2-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 504 hand transmitter
4-channel, 433 MHz, KeeLoq rolling code



Micro-Novotron 512 hand transmitter
2-channel, 433 MHz,

Somfy Optional Extras



Somfy Wireless Keypad
2 RTS, 2 Channel, Multiple codes, 433MHz RTS




Somfy Wall Switch
433MHz RTS



Somfy Wireless Push Button
RTS, 3 Channel 433MHz RTS



Somfy Keygo
4 RTS, 4 Channel 433MHz RTS



Low Level EMR
Includes hand crank for insulated roller shutter




Somfy Connectivty Kit
Somfy smart home kit, not bi-directional




Wireless Switches



Signal 111 remote wall switch
2-channel, 433 MHz, KeeLoq rolling code for controlling 2 operators or 1 operator and 1 outside lighting in UV-resistant material



Signal 218 remote coded key pad
10 codes, 433 MHz, KeeLoq rolling code with stainless steel cover, backlit in UV-resistant material



Signal 112 wall switch
Start key, holiday switch, continuous light (On/ Off), 24 V connection to the operator in UV-resistant material



Coded key pad signal 213
3 signals, metal key pad, 230 V connection

Wired Switches



Extra 625 one-way opto sensor
24 V DC, IP 54
Range: 8 m
Suitable for:
All operator models



Extra 626 one-way opto sensor
20-28 V, IP 50, 2 wire
Range: 8 m
Suitable for:
Novomatic 423/ 563 S & NovoPort®



Extra 628 reflection light opto sensor
24-240 V AC, 12-240 V DC, IP 54
Range: 5 m
Can only be used as a pulse generator



De-Latch for Novoferm retractable lifting up & over doors

Suitable for 2-point and 4-point rigid bar locking systems supplied with complete locking systems.



For installations of Novoferm 573 S & 443 operators

When fitted to our retractable lifting up & over doors aids quick and easy installation and reduces noise reverberation.

Terms and Conditions

Warranty

In the unlikely event of a warranty claim becoming necessary please contact the dealer or distributor who supplied the door.

To enable your claim to be processed without delay you should provide the following information:

- Your name, address and contact telephone number
- The original invoice and date of purchase
- A description of the door, the door type and the product number
- A description of the reason for the claim

Your dealer will then supply details of your claim, together with a copy of the warranty card supplied with the door and proof of purchase, to the warranty department at Novoferm UK.

An assessment of the claim will be made. This may mean Novoferm will need to come and inspect your door at your premises.

In the event that there is no legitimate claim under the terms of the warranty you will be liable for the costs of this visit.

It is essential that you take note of the care and maintenance instructions provided with your door and you follow these instructions throughout the lifetime of your door.

The warranty does not cover:

- Improper installation
- Normal wear and tear
- Priming and other surface protection treatments
- Negligent or wanton destruction
- Incorrect or too late applied surface protection treatments
- Repair by a non-qualified installer
- Use of non-Novoferm parts without the approval of Novoferm
- Damage or removal of the product number or making it unidentifiable
- Improper operation
- External influences, such as fire, salts, water, sun, alkaline solutions, abnormal environmental influences
- Mechanical damage caused by improper transport or installation

All dark colours which are exposed to direct sunlight should be avoided. Dark coloured doors may undergo expansion due to heat absorption. Such instances are not covered by the guarantee, however normal performance will revert when the door has cooled down if the heat absorption has affected the door's performance.

Warranty and Maintenance

Up and Over Garage Door Finish

Our steel up and over doors are fully finished with a powder coat paint. Weathering and sun exposure can cause the finish to fade. We guarantee 5 years steel doors finished fully and that any fading will be minimal and uniform, providing the door is maintained in accordance to the care and maintenance advice.

Side Hinged Garage Door Finish

Our steel side hinged doors are fully finished with powder coat paint. Weathering and sun exposure can cause the finish to fade. We guarantee the finish on doors for five years and that any fading will be minimal and uniform, providing the door is maintained in accordance with the care and maintenance advice.

Roller Garage Door Lath Finish

Our Roller doors come in two finishes; a polyester powder coat and a woodgrain laminate. Weathering and sun exposure can cause the laths to fade. We guarantee the finish for 5 years and that any fading will be minimal and uniform, providing the door is maintained in accordance to the care and maintenance advice. Please note: due to the rolling action of the door, surface marking can be caused by security locks, dust and debris. This does not constitute as a product fault and performance is not affected in any way.

Sectional Garage Door Finish

Our sectional doors are fully finished with a sprayed colour finish or with a foil backed laminated finish. Weathering and sun exposure can cause the finish to fade. We guarantee the finish on doors for 5 years and that any fading will be minimal and uniform, providing the door is maintained in accordance to the care and maintenance advice.

Our promise

During the warranty period, we undertake to rectify any defects to the Novoferm product, which can be proven to be attributed to a material or manufacturing defect.

We promise, at our discretion, to either exchange the defective merchandise or repair.

Replacement parts remain our property.

Warranty Requirements

This warranty only covers manufacturing faults to the purchased garage door or garage door operators. Damage to these is not covered. You will be required to show a fully completed warranty service passport (service to be conducted by a qualified engineer annually), together with a receipt of purchase, which correspondingly substantiates your right to claim under warranty. In the event of a claim, please contact the company who supplied/installed the doors. They will raise the warranty on your behalf.

During the claims process, a site inspection may be required. For this we will send an independent assessor. Should this inspection indicate the fault was not caused by a manufacturing defect, you will be liable for the cost of a non-warranty call out. The cost of the call out will be advised prior to the arranged visit.

Novoferm will not accept consequential costs for installation or de-installation, inspection of parts, transport ,and postage costs.

Up and Over, Side Hinged and Sectional Doors - What is covered?

Subject to the terms and conditions outlined in this document. Novoferm garage doors offer the warranty:

- 10 Years – Safe and reliable operation (for use up to 5 open/close cycles per day)
- 10 years – Structural integrity of door panels
- 10 years – Panel corrosion

- 10 years – retractable, sectional and side hinged doors (2 years on canopy doors) on immovable frame parts
- 5 years – Steel Doors
- 5 years –Insulated sectional doors
- 2 years – movable and mechanical parts (including, but not limited to, springs, rollers wheels, locking points, rods/cables, barrel and locking mechanisms)

Insulated Roller Door - What is covered?

Subject to Terms and conditions outlined in this document. Insulated roller doors offer the following warranty:

- 5 years – Motor
- 5 years – control unit
- 2 years – remote controls and accessories (excluding batteries, bulbs and fuses)
- 5 years – lath finish
- 2 years – movable and mechanical parts (including but not limited to locking straps and rings, safety brake.)

Care and maintenance

Your door should be kept clean, with any stains removed as soon as possible. You should also ensure the door does not come into contact with any caustic or acidic substance, which could damage the door surface or structure. Your door should be cleaned thoroughly approximately every 2-3 months (in coastal areas or areas close to large bodies of saltwater, this should be done weekly) using warm water and a soft cloth or sponge. Allow to dry naturally. Never use detergent, abrasive, caustic, or solvent-based cleaners. Lubricate all springs, latches, wheel spindles, and pivot points using a light lubricating oil (e.g., 3-in-1). Take care not to allow oil to drip onto the face of the door. Ensure track runners are clean and free from obstacles at all times. Check moving parts for signs of wear. If any wear is detected, arrange for these to be replaced as soon as possible (failure to replace these parts can invalidate your warranty). Do not paint springs or any moving parts. For automated doors (retractable), do not operate the door when not within visual range.

Corrosion

Doors situated in 'high corrosive' areas such as within 3 miles of the sea or a large body of saltwater are not covered for rust or corrosion of steel parts. Cleaning of the doors is especially important in these locations.

All Novoferm Garage Doors - What is not covered?

- Improper installation, negligent care and maintenance - doors which have not been maintained or had annual maintenance/ servicing
- Improper initial and subsequent operation
- Negligent or wanton destruction
- External influences, such as: fire, water, salts, alkaline solutions, acids and any abnormal environmental influences, sunlight
- Mechanical damage, through improper transport and fitting, or through falling or hitting objects
- Repair by non-qualified persons
- Using non-Novoferm parts without the written approval of the manufacturer
- Removal of the product number, or making it unidentifiable
- Application of additional, non-approved weights or infills
- Failure to remove the protective film or packaging provided with the product, where applicable
- Failures caused by extreme or abnormal weather conditions

Visual standards check

Visual standard checks must be carried out prior to a warranty submission. This check should be carried out in natural daylight, not direct sunlight, standing at a distance of 3m from the door to view the overall appearance. Doors are acceptable if the following are not readily visible on the face of the door:

- Marks or distortion associated with the manufacturing process
- Minor indentations, marks, or scuffs on the surface
- Paint or Stain Blemishes

Operators and Accessories Warranty

Our promise:

During the warranty period, we undertake to rectify any defects to the Novoferm product, which can be proven to be attributed to a material or manufacturing defect. We promise, at our discretion, to either exchange the defective merchandise or repair it. Replacement parts remain our property.

Warranty Requirements

The warranty only covers manufacturing faults to the purchased garage door or garage door operator. Damage to these is not cover. You will be required to show a fully completed warranty service passport (service to be conducted by a qualified engineer annually), together with a receipt of purchase, which substantiates your right to claim under warranty. The finish on doors is exempt from the service requirements.

In the event of a claim, please contact the company that supplied/ installed the doors. They will raise the warranty on your behalf.

What is covered?

Subject to the terms and conditions outlined in this document. Operators and accessories offer the following warranty:

- 5 years – Novomatic operator (573S/443)
- 5 years – Novoport Speed operator (sectional doors)
- 5 years – Somfy Rollixx, Novorol and Teleco control units (roller doors)
- 2 years- all remote control parts and accessories (excluding batteries, bulbs and fuses

What is not covered?

- Improper installation, negligent care and maintenance.
- Improper initial and subsequent operation
- Negligent or wanton destruction.
- External influences, such as: fire, water, salts, alkaline solutions, acids and any abnormal environmental influences.
- Mechanical damage, through improper transport and fitting, or through falling or hitting objects.
- Repair by non-qualified persons.
- Using non-Novoferm parts without the written approval of the manufacturer.
- Removal of the product number, or making it unidentifiable.
- Operators used upon a door which exceeds rated lifting capacities.
- Failure to remove the protective film or packaging provided with the product, where applicable.
- Failures caused by extreme or abnormal weather conditions.

DESIGNED TO IMPRESS. CRAFTED TO LAST.

Your Novoferm Stockist



Intelligent Door Solutions

Novoferm UK Ltd
Unit 5 - 9 North Luton Industrial Estate
Sedgwick Road
Luton
LU4 9DT
E: customerservice@novoferm.co.uk
www.novoferm.co.uk

Opening times

8.30am - 5.00pm
Monday to Friday



Call Us Now +44 (1582) 563777