



 **GERMAN
ENGINEERED**

Novoferm Steel Garage Doors



Intelligent Door Solutions



www.novoferm.co.uk

Our Story

Novoferm are proud to be a part of the Sanwa Holding Corporation, founded in 1986 and today, considered to be a major global player in the access systems industry.

Sanwa conduct business in 25 countries and regions worldwide with a strong presence in Japan, North America, and Europe.

At Novoferm, we are building a team and giving them the support to achieve our ambitions. We will continue building on the improvements and investments that have already begun to improve lead-time reliability and quality for all our clients.

Our vision is to lead through organic business improvement, investment, digital enablement, and tuck-in acquisitions.



Contents

We'll find the right solution for you and see that it is tailored to your exact requirements. Whether you're building a new garage or renovating an existing one, you'll find that our incredible selection of doors are always the right choice.



Steel Up & Over Doors	4-7
Novoguard Doors	8-9
Steel Side-Hinged Doors	10-13
Steel Matching Side Doors	14
Colours and Glazing	15
Automation and Accessories	16-17
Warranty and Maintenance	18
Terms and Conditions	19





Steel Up & Over Door Range



Steel Up & Over Doors



SCAN TO SEE MORE DETAILS

Up and over doors are a simple yet effective design that opens by kicking outwards then sliding upwards back along a track that runs along the ceiling. These doors can be both manual or automated for added convenience.

Our steel up and over garage doors are available in a range of designs, colours and finishes.

Our steel up and over doors are specially prepared to ensure the maximum lifespan. The quiet rollers and abrasive strips ensure smooth operation. Multiple spring assemblies ensure sturdiness and ease of use.



Smooth Operation

ALL DOORS available with either canopy or retractable spring assisted gear systems for smooth, safe and reliable operation.

Safe and Secure

HIGH SECURITY supplied with 4-Point Slam latching as standard, or 4-Point Locking Bar as optional extra.

Other benefits include:

- ☒ High Distortion Resistance
- ☒ Wide Range of Colours
- ☒ Automatic Operators Available



WARRANTY COVER



MADE TO MEASURE



REMOTE OPTION



SECURITY LOCKING

STEEL UP AND OVER DOORS

Styles

Novoferm Steel Up & Over Garage Doors are the classic choice for your home. They are manufactured from premium grade galvanized steel and finished in white powder coat or powder coat in one of our standard colours. Black euro handle fitted as standard.



Berwick



Horizontal



Vertical



Horsham



Victor



Helios



Venus



Minster



Georgian

*Please note: For Helios and Horsham designs over a certain width, a central vertical panel will need to be inserted for stability.
Helios max width - 2496mm | Horsham max width - 2438mm



Regency



Regency Glazed



Berkeley Vertical



Wentworth





Novoguard Door Range



Novoguard Doors



SCAN TO SEE MORE DETAILS

Novoguard Secured by Design doors are approved by ACPO (Association Of Chief Police Officers).

Novoguard doors featuring retractable lifting operation and including a 70mm steel fixing frame are available in any size up to and including 2438mm wide x 2134mm high.

Our Improved Security Doors:



Retractable Steel **Berwick**



Retractable Steel **Vertical**



Retractable Steel **Horizontal**



WARRANTY
COVER



MADE TO
MEASURE



SECURITY
LOCKING





Steel Side-Hinged Doors

Our popular Side-Hinged doors offer a 'traditional' operation and are ideal if there are obstructions within the garage.

Side-Hinged doors open as per a normal pedestrian door with two door leaves connected by hinges at the side to the main door frame. Customers can choose a 50/50 split with both doors of equal size, or an offset configuration, with one smaller personnel door.

Our Side-Hinged doors are available in a range of patterns, surfaces, and colours, and customers can choose from an array of additional fittings.

All the door leaf frames are made from galvanised steel.

The robust hinges will provide long-term opening and closing that is dimensionally accurate. Choose whether to open both of the doors or just the active leaf and choose from a range of customisable fittings to personalise your doors.



WARRANTY COVER



MADE TO MEASURE



SECURITY LOCKING


Key Features & Benefits

- Centre overlap to help prevent forced entry and reduce draughts
- High Security Euro profile mortice lock
- Twin shoot bolts top and bottom for added security
- Stays to prevent the door opening further than 110 degrees
- Doors open inward & outward, with the lock available on the left or the right
- Left hand opening option available
- Side-Hinged doors are available in a 50/50 split or offset configuration*. (*Only available in 9 Panel Georgian and Vertical designs.)
- Side-Hinged doors are bespoke and made to order
- Various glazing options are available
- Available in an array of eye-catching colours, with options to suit any preference and the period and aesthetics of your home.

Side-Hinged Door Range

STEEL SIDE-HINGED DOORS

Styles

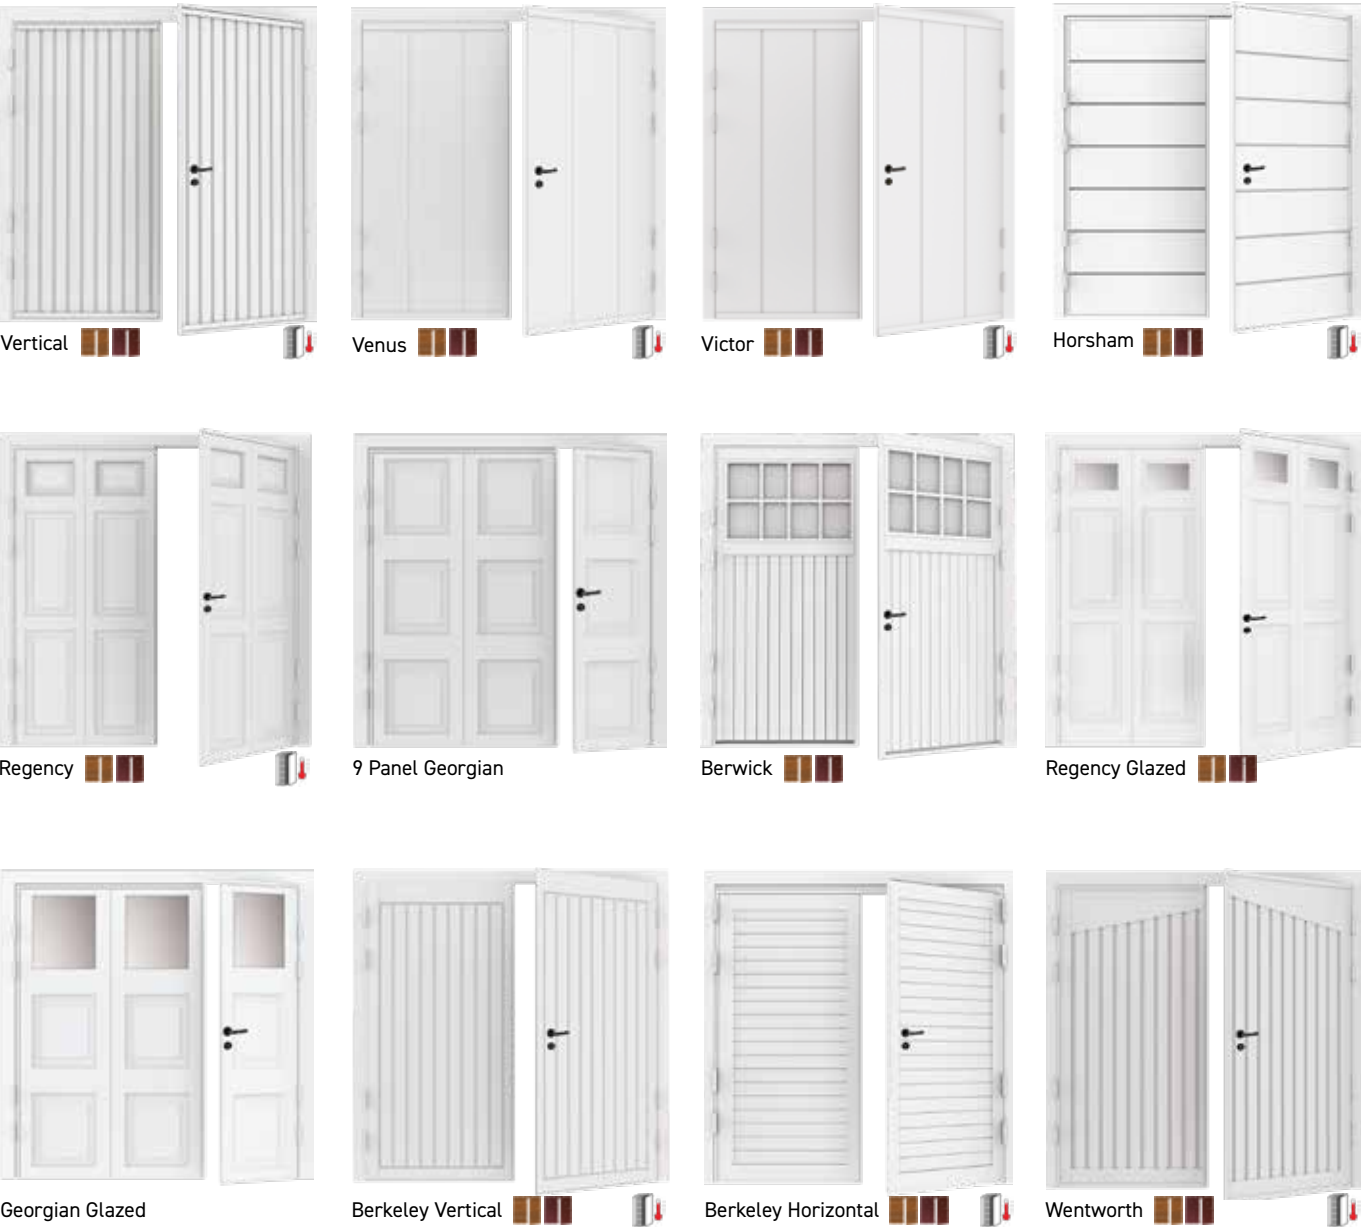

- = Available in Rosewood
- = Available in Golden Oak
- = Door style available with Insulated NovoTherma
- = Please note that the rear of all NovoTherma Insulated doors will be finished in white

The large leaf can be the lead door. Please see the opening options (viewed from outside) below:

A 2/3-1/3 Left Hand Opening C 2/3-1/3 Right Hand Opening
B 1/3-2/3 Left Hand Opening D 1/3-2/3 Right Hand Opening

Side-Hinged handles are available in black and silver



NEW NovoTherma

NovoTherma is Novoferm's advanced insulated door available in **Side-Hinged** and **Side Personnel Doors**, engineered to deliver outstanding thermal performance, enhanced security, and long-lasting durability. Ideal for modern garages and side access points.

Designed as a superior upgrade to traditional non-insulated and single-locking doors, NovoTherma features a fully insulated panel construction paired with a robust 3-point locking system as standard. This combination provides improved energy efficiency, increased structural strength, and reliable protection against harsh weather and forced entry.



Key Features & Benefits

- Stay Warmer, Save Energy:** Fully insulated door panels help maintain indoor temperatures and boost energy efficiency. U-Value from 2.4 W/m2.K and the insulation being Polyisocyanurate (PIR) with a 30mm thickness.
- Feel Secure:** A 3 -point locking system delivers robust protection against forced entry; a security you can trust.
- Built to Last:** Durable construction resists wear, weather and everyday use for years of reliable performance.
- Easy Operation:** Smooth locking mechanism and balanced door movement.
- Clean Finish:** The internal white surface adds a sleek, contemporary look while sealing and safeguarding the insulated core.
- Availability:** The NovoTherma upgrade is available with Personnel Doors and on Side-Hinged doors with a 50/50 split configuration and without glazing.



Steel Matching Side Doors

Steel Matching Side Doors are pre-framed and come complete with a Euro profile deadlock and four anti-drop anchored bolt hinges per door leaf.

Doors open inward and outward, with the lock available on the left or the right.

These doors are available in the following finishes to match the door ranges: Painted, Golden Oak or Rosewood.

All door leaf frames are made of galvanised steel, while robust hinges provide long-term, dimensionally accurate opening and closing.



Horizontal



Vertical



Georgian



Regency



Victor



Horsham



Venus



Helios

= Rear of all NovoTherma Insulated doors will be finished in white.

= Available with Insulated NovoTherma. Not available with Glazed options.

= Available in Golden Oak and Rosewood.

novoferm

Intelligent Door Solutions



WARRANTY COVER



MADE TO MEASURE



SECURITY LOCKING

STEEL DOOR RANGE

Colours & Glazing

Essential Colours



TRAFFIC WHITE RAL 9016



JET BLACK RAL 9005



ANTHRACITE GREY RAL 7016



Bespoke Colours
RAL colours
available on request

Premium Colours



PURE WHITE RAL 9010



CREAM RAL 9001



CLAY STONE RAL 080.80.05



LIGHT GREY RAL 7035



AGATE GREY RAL 7038



STONE GREY RAL 7030



SIGNAL GREY RAL 7004



WINDOW GREY RAL 7040



SILVER GREY RAL 7001



SLATE GREY RAL 7015



BLACK BROWN RAL 8022



PEBBLE GREY RAL 7032



CHARTWELL GREEN BS14C35



SAGE NCS 4005-G80Y



FIR GREEN RAL 6009



MOSS GREEN RAL 6005



DUCK EGG RAL 260.80.10



BRILLIANT BLUE RAL 5007



STEEL BLUE RAL 5011



COBALT BLUE RAL 5013



CLAY BROWN RAL 8003



CHERRY BROWN CHROMA 3353



CHOCOLATE BROWN RAL 8017



RUBY RED RAL 3003



BROWN RED RAL 3011

Timber Effect

Choose from 2 high grade Timber Effect laminate finishes.

*Available in some designs only, please check with your installer. All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Rivets are visible on the face of the door in some door styles and all Timber Effect laminated doors.



GOLDEN OAK



ROSEWOOD

Matching hinge available in this colour

Glazing & Leading Options

The following Novoferm side hinged and up and over doors are available with your choice of glazing and leading options.



Clear



Stippled



Black



Diamond Lattice



Square Lattice




Queen-Anne Lattice



SCAN TO SEE MORE DETAILS

Automate your Garage Door

- ✓ Intuitive Adjustment
- ✓ Smartphone-Enabled Door Control
- ✓ Remote Lighting
- ✓ Control More Than One Garage
- ✓ Suitable for Up and Over Doors

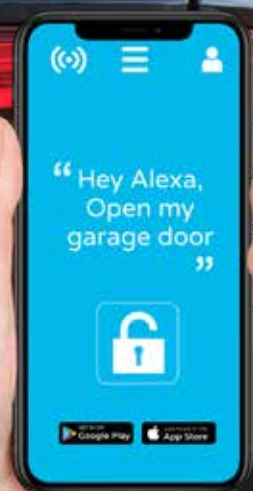

Homematic IP App

Novoferm garage door operators used with up and over doors can be controlled via the 'Homematic IP' app. You can download it free of charge from the App Store or Google Play.

All our garage door operators and additional hardware (e.g., light strips) are fitted with energy-saving LED lamps and many of our operators only consume 0.5 W in standby mode. All Novoferm operators are manufactured to the highest industry standards and come with a five-year guarantee.

Hand transmitters are protected by AES 128-bit encryption and multi-part rolling codes.

The approved 3-button technology helps with simple and fast adjustment of the operator functions. We also offer a variety of special attractive control pads which are constructed from UV-stable materials.

Novomatic 573S 800 N



- Energy saving with 0.5 Watt power supply in stand-by mode.
- Power supply: 230 V / 50 Hz.
- Pull and push force 800 N.
- Running Speed: 24 cm/s.
- Maximum door area: 18 m².
- App Control available.
- CE marked.

Novomatic 443 600 N



- Energy saving with 0.5 Watt power supply in stand-by mode.
- Power supply: 230 V / 50 Hz.
- Pull and push force: 600 N.
- Running speed: 18 cm/s.
- Maximum door area: 10 m².
- App Control available.
- CE marked.



WARRANTY COVER

Accessories

You'll need the right accessories to go with the hardware of your choice

Hand transmitters



Mini-Novotron 522 Design hand transmitter
2-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 524 Design hand transmitter
4-channel, 433 MHz, KeeLoq rolling code



Mini-Novotron 522 hand transmitter
2-channel, 433 MHz, KeeLoq rolling code




Mini-Novotron 524 hand transmitter
4-channel, 433 MHz, KeeLoq rolling code

Wireless

Wired



Signal 111 remote wall switch
2-channel, 433 MHz, KeeLoq rolling code for controlling 2 operators or 1 operator and 1 outside lighting in UV-resistant material



Signal 218 remote coded key pad
10 codes, 433 MHz, KeeLoq rolling code with stainless steel cover, backlit in UV-resistant material



Signal 112 wall switch
Start key, holiday switch, continuous light (On/ Off), 24 V connection to the operator in UV-resistant material



Coded key pad signal 213
3 signals, metal key pad, 230 V connection

Warranty and Maintenance

Our Promise

During the warranty period, we undertake to rectify any defects to the Novoferm product, which can be proven to be attributed to a material or manufacturing defect.

We promise, at our discretion, to either exchange the defective merchandise or repair it.

Replacement parts remain our property.

What is Covered

Subject to the terms and conditions outlined in this document. Novoferm garage doors offer the warranty:

- 10 Years – Safe and reliable operation (for use up to 5 open/close cycles per day)
- 10 years – Structural integrity of door panels
- 10 years – Panel corrosion
- 10 years – retractable, sectional and side hinged doors (2 years on canopy doors) on immovable frame parts
- 5 years – Steel Doors
- 2 years – movable and mechanical parts (including, but not limited to, springs, rollers, wheels, locking points, rods/cables, barrel and locking mechanisms)

Up and Cover Steel Garage Doors

Our steel up and over doors are fully finished with a powder coat paint. Weathering and sun exposure can cause the finish to fade. We guarantee 5 years steel doors finished fully and that any fading will be minimal and uniform, providing the door is maintained in accordance to the care and maintenance advice.

Corrosion

Doors situated in 'high corrosive' areas such as within three miles of the sea, or a large body of saltwater, are not covered for rust or corrosion of steel parts. Cleaning of the doors is especially important in these locations.

Warranty Requirements

The warranty only covers manufacturing faults to the purchased garage door or garage door operator. Damage to these is not covered. A visual standards check will need to be carried out. You will also be required to show a fully completed warranty service passport (service to be conducted by a qualified engineer annually), together with a receipt of purchase, which correspondingly substantiates your right to claim under warranty.

The finish on doors is exempt from the service requirements. In the event of a claim, please contact the company that supplied/installed the doors. They will raise the warranty on your behalf.

During the claims process, a site inspection may be required. For this, we will send an independent assessor. Should this inspection indicate the fault was not caused by a manufacturing defect, you will be liable for the cost of a non-warranty call out. The cost of the call out will be advised prior to the arranged visit.

Novoferm will not accept consequential costs for installation or de-installation, the inspection of parts, transport, and postage costs.

Care and Maintenance

Your door should be kept clean with any stains removed as soon as possible. You should also ensure that the door does not come into contact with any caustic or acidic substance which could damage the door surface or structure.

Your door should be cleaned thoroughly approximately every 2-3 months (in coastal areas or areas close to large bodies of saltwater, this should be done weekly) using warm water and a soft cloth or sponge. Allow the door to dry naturally. Never use detergent, abrasive, caustic, or solvent-based cleaners.

What is not Covered?

- Improper installation, negligent care and maintenance - doors that have not been maintained or had annual maintenance/servicing
- Improper initial and subsequent operation
- Negligent or wanton destruction
- External influences, such as fire, water, salts, alkaline solutions, acids, and any abnormal environmental influences, sunlight
- Mechanical damage, through improper transport and fitting, or through falling or hitting objects
- Repair by non-qualified persons
- Using non-Novoferm parts without the written approval of the manufacturer
- Removal of the product number, or making it unidentifiable
- Application of additional, non-approved weights or infills
- Failure to remove the protective film or packaging provided with the product, where applicable
- Failures caused by extreme or abnormal weather conditions

Visual Standards Check

A visual standards check must be carried out prior to a warranty submission. This check should be carried out in natural daylight, not direct sunlight, standing at a distance of 3m from the door to view the overall appearance. Doors are acceptable if the following are not readily visible on the face of the door:

- Marks or distortion associated with the manufacturing process
- Minor indentations, marks, or scuffs on the surface
- Paint or stain blemishes

Full full details on our warranty and maintenance, please visit www.novoferm.co.uk/installation-warranty-and-maintenance-details/

Terms and Conditions

Warranty

In the unlikely event of a warranty claim becoming necessary please contact the dealer or distributor who supplied the door.

To enable your claim to be processed without delay you should provide the following information:

- Your name, address and contact telephone number
- The original invoice and date of purchase
- A description of the door, the door type and the product number
- A description of the reason for the claim

Your dealer will then supply details of your claim, together with a copy of the warranty card supplied with the door and proof of purchase, to the warranty department at Novoferm UK.

An assessment of the claim will be made. This may mean Novoferm will need to come and inspect your door at your premises.

In the event that there is no legitimate claim under the terms of the warranty you will be liable for the costs of this visit. It is essential that you take note of the care and maintenance instructions provided with your door and you follow these instructions throughout the lifetime of your door. It is essential that you take note of the care and maintenance instructions provided with your door and you follow these instructions throughout the lifetime of your door.

The warranty does not cover:

- Improper installation
- Normal wear and tear
- Priming and other surface protection treatments
- Negligent or wanton destruction
- Incorrect or too late applied surface protection treatments
- Repair by a non-qualified installer
- Use of non-Novoferm parts without the approval of Novoferm
- Damage or removal of the product number or making it unidentifiable
- Improper operation
- External influences, such as fire, salts, water, sun, alkaline solutions, abnormal environmental influences
- Mechanical damage caused by improper transport or installation

All dark colours which are exposed to direct sunlight should be avoided. Dark coloured doors may undergo expansion due to heat absorption. Such instances are not covered by the guarantee, however normal performance will revert when the door has cooled down if the heat absorption has affected the door's performance.

All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Prices

All orders are accepted on the understanding that the goods will be subject to the prices ruling at the time of delivery, unless other terms are specifically agreed. All prices are in £ sterling and exclude VAT.

A 25% handling charge applies to all unwanted items on standard stock items only. Items must be returned unopened and in an unused condition.

All returns are subject to acceptance by Novoferm UK Limited.

Specification

Due to the progressive outlook of the Novoferm Group we reserve the right to alter specifications to design and manufacture without notification. All specifications and details are correct at the time of publication, errors and omissions excepted.

All Doors

Colour match Pairs of doors should be ordered together to obtain the best colour match, bearing in mind the limitations of the materials used in the construction.

Size variations As the size of a door changes in height and/or width, the panel frequency and profile can change, therefore doors of the same style but of different sizes can be significantly different in appearance.

Right to Cancel

Any bespoke product which is made to measure/customised, is exempt of any cancellation rights.



Your Novoferm Stockist



Intelligent Door Solutions



V:07.2026.2

Call Us Now +44 (1582) 563777

Opening times
8.30am - 5.00pm
Monday to Friday

Novoferm UK
Unit 5 - 9 North Luton Industrial Estate
Sedgwick Road
Luton
LU4 9DT
E: customerservice@novoferm.co.uk
www.novoferm.co.uk