



Front view

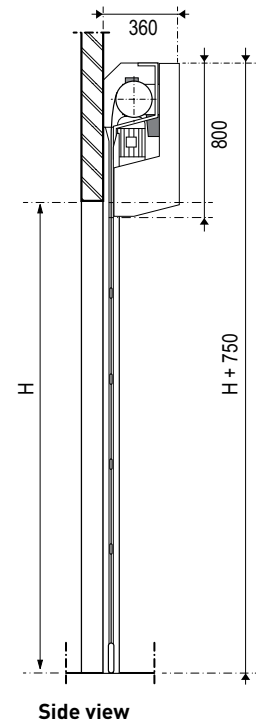


Side view

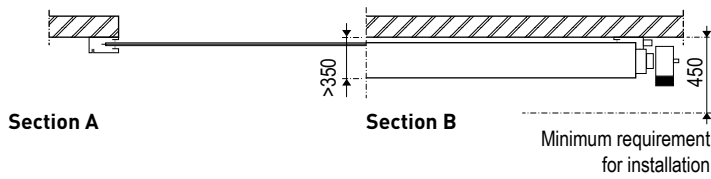


Section A

Section B

Minimum requirement for installation

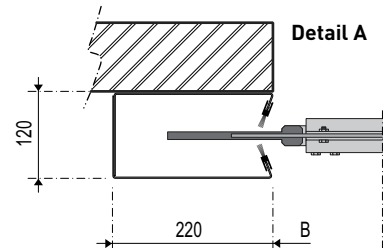

Detail A

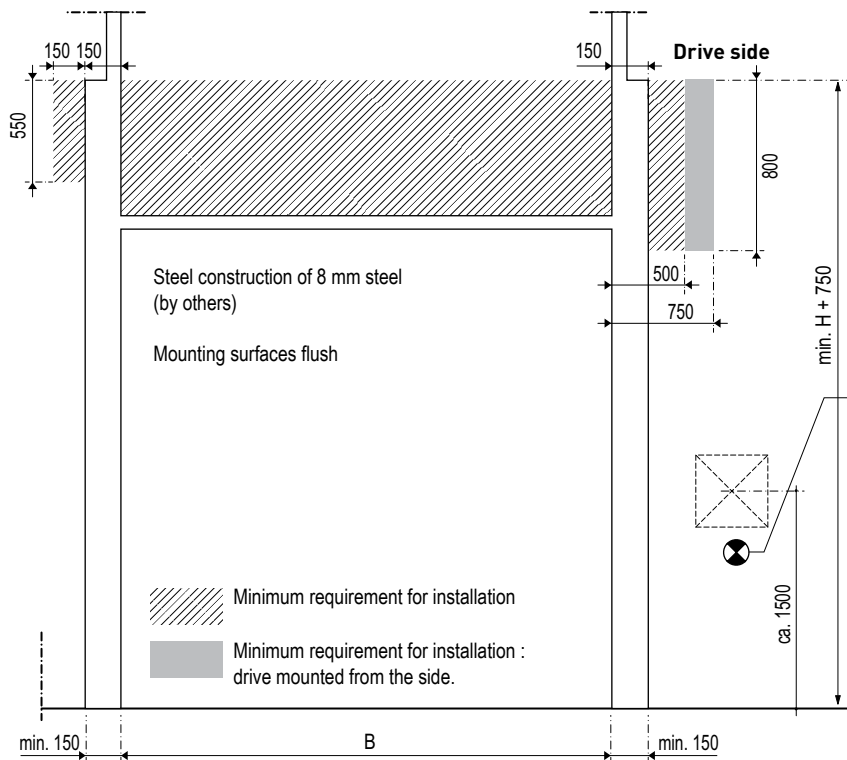

Steel construction of 8 mm steel (by others)

Mounting surfaces flush

Minimum requirement for installation

Minimum requirement for installation : drive mounted from the side.

Drive side

800

500

750

min. H + 750

ca. 1500

min. 150

B

min. 150

## Installation requirements

### INDOOR

Control box with contactors :

CEE-form 3~N PE 400V/50Hz/16A

Control box with frequency inverter :

CEE-form 3~N PE 400V/50Hz/T16A

### OUTDOOR

Always :

CEE-form 3~N PE 400V/50Hz/T16A

Electrical supply by others

control box/ power supply, inside RIGHT

control box/ power supply, inside LEFT